

7-21-00

A

PTO/SB/05 (12/97) (modified)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U. S. DEPARTMENT OF COMMERCE

Please type a plus sign (+) inside this box → ☒

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

SCH/BARCODE

Total Pages

39

First Named Inventor or Application Identifier

Scott C. Harris

Express Mail Label No.

EL584933422US

## CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Express Mail Label No.: EL584933422US

Date of Deposit: July 19, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

  
 Janet Christy

### APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

 Assistant Commissioner for Patents  
 Box Patent Application  
 Washington, DC 20231

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages  ]  
(including)
  - Descriptive title of the Invention
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets  ]
4. ☒ Oath or Declaration [Total Pages  ]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d)  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]
  - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in  
the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 4b, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. Computer Readable Copy
  - b. Paper Copy (identical to computer copy)
  - c. Statement verifying identity of above copies

### ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)-  
(Should be specifically itemized)
14. ☒ Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Patent Coversheet

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \*

### 18. CORRESPONDENCE ADDRESS

 Scott C. Harris  
 Registration No. 32,030  
 P.O. Box 927649  
 San Diego, CA 92192

 Telephone: (619) 823-7778  
 Facsimile: (619) 272-1456

- ☐ If a paper is untimely filed in the above-referenced application by applicant or his/her representative, the Assistant Commissioner is hereby petitioned under 37 C.F.R. § 1.136(a) for the minimum extension of time required to make said paper timely. In the event a petition for extension of time is made under the provisions of this paragraph, the Assistant Commissioner is hereby requested to charge any fee required under 37 C.F.R. § 1.17(a)-(d) to **Deposit Account No. \_\_\_\_\_**. However, the Assistant Commissioner is **NOT** authorized to charge the cost of the issue fee to the Deposit Account.

The filing fee has been calculated as follows:

FOR	NUMBER FILED	NUMBER EXTRA	RATE	CALCULATIONS
TOTAL CLAIMS	60 - 20 =	40	x \$9.00	\$360
INDEPENDENT CLAIMS	7 - 3 =	4	x \$39.00	\$156
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$0
			BASIC FEE	\$345.00
TOTAL OF ABOVE CALCULATIONS =				\$861.00
Assignment Recording Fee (if enclosed)				\$0.00
TOTAL =				\$861.00

- ☒ A check in the amount of \$861.00 is attached.
- ☐ Charge \$ \_\_\_\_\_ to **Deposit Account No. \_\_\_\_\_** referencing docket no. \_\_\_\_\_.

Applicant(s) hereby petitions for any required relief including extensions of time and authorizes the Assistant Commissioner to charge the cost of such petitions and/or other fees or to credit any overpayment to **Deposit Account No. 50-1387** referencing docket no. Barcode. A duplicate copy of this transmittal is enclosed, for that purpose.

Dated: July 19, 2000

Respectfully submitted,

By:

*Scott C. Harris*  
 Scott C. Harris  
 Registration No. 32,030

Customer No. 23844  
 Scott C. Harris  
 P.O. Box 927649  
 San Diego, CA 92192  
 Telephone: (619) 823-7778  
 Facsimile: (619) 272-1456

Applicant or Patentee: Scott C. Harris  
 Serial or Patent No.:  
 Filed or Issued: Herewith  
 For: BAR CODE DATA ENTRY DEVICE

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
 (37 CFR 1.9(f) and 1.27(b)) - INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled BAR CODE DATA ENTRY DEVICE described in

- ☒ the specification filed herewith.  
☐ application serial no. , filed .  
☐ patent no. , issued .

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ no such person, concern, or organization.  
☐ persons, concerns or organizations listed below\*.

\*NOTE: Separate verified statements are required from each named person, concern, or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

Full Name: \_\_\_\_\_

Address: \_\_\_\_\_

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status when any new rule 53 application is filed or prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Inventor: Scott Harris

Signature: Scott Harris Date: 7/19/00

APPLICATION  
FOR  
UNITED STATES LETTERS PATENT

TITLE: BAR CODE DATA ENTRY DEVICE

APPLICANT: SCOTT C. HARRIS

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL 584 933 422US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

7-19-00  
Date of Deposit

  
Signature

Janet Christy

Typed or Printed Name of Person Signing Certificate

BAR CODE DATA ENTRY DEVICE

BACKGROUND

The present application relates to bar codes, and to  
5 scanning of bar codes and other scannable type codes to obtain  
and enter information.

Bar codes are often used in scanning of information. A  
bar code provides information based on sizes of its different  
parts.

10 Typical linear/ one-dimensional bar codes provide white  
and dark bars forming a bar code image. Linear bar codes may  
include Universal Product Codes (UPCs), Type 39 bar codes and  
type 128 bar codes. Two-dimensional bar codes, including a  
"matrix" code and the "Gettysburg Address" type bar code, are  
15 also known. Bar codes have been used for many purposes  
including inventory control.

SUMMARY

The present application teaches using scanned information  
20 from a scannable code to enter special kinds of information.  
One embodiment describes using the scannable code in place of  
a photo. Another embodiment describes bar codes being sent as  
part of a message, where the message can be an advertisement,  
an email, or the like. The information in the bar code

relates to some aspect of the message. For example, one embodiment describes using the bar code to represent a meeting time that is described in an email. Another embodiment describes using the bar code to represent a time and place of a function being advertised, e.g. an event. The bar codes can represent the information itself, or can represent an address from a look up database which includes more information about the bar code.

Another embodiment describes special kinds of bar codes which store additional information in a different way than previously carried out. One of these information types is a progressive information type where the bar code can be read by either a linear or a two-dimensional bar code scanner.

# BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects will now be described in detail with respect to the accompanying drawings, wherein:

Figures 1A and 1B show an image used in a cellular telephone and/or a portable computer;

Figure 2 shows a flowchart of operation of the sensor;

Figure 3 shows a diagram of encoding of a photo;

Figure 4 shows a message with an associated bar code entry part;

Figure 5 shows a client-server Internet embodiment;

Figure 6 shows a bar code meeting system; and  
Figure 7A-7C show new specialized bar code schemes.

#### DETAILED DESCRIPTION

5       The present application teaches using a symbolical code, such as a bar code, to enter information into a computer device. The computer device can be a portable computer which is described herein as being any computer in which the display and user interface are within the same housing, or a personal  
10   digital assistant which is a smaller version of the personal computer, which again has data entry parts and display within a single housing, but has outer perimeters which are sized to fit any user's hand, e.g. less than ten inches by ten inches. Another embodiment describes a special kind of PDA which  
15   includes a portable telephone such as a cellular telephone, included therein.

      The bar codes can be imaged/scanned in a number of different ways. One embodiment discloses using a camera to input and decode these bar codes. The embodiments are shown  
20   in Figures 1A and 1B. Figure 1A describes using a personal digital assistant 100 as the input device. One preferred input device of this type is the Palm V(TM) type hand held computer. A bar code scanner can be used, such as the commercially available Symbol Technology SPT 1700.

Alternatively, a camera add-on unit can be added to the Palm V and used as described herein. The PDA includes a screen 145 and user interface 146 all within the same housing 99.

Figure 1B shows the client being a cellular telephone which also may include a screen 145 and user interface 150. The cellular telephone can be associated with either a dedicated bar code scanner or an image sensor 160 of the type used to obtain photographs for video telephony.

In both devices, the input device obtains either a scan of the bar code, or an image of the bar code on a medium. The medium can be a display screen such as a computer display screen, or can be a sheet of paper. The information in the bar code is entered into the computer.

If a dedicated bar code scanner is used, then the value of the bar code is automatically output from the scanner by the operating system associated with the bar code scanner. Figure 2 shows the flowchart which is used to obtain scanning information from a camera.

First the scan of the barcode image is acquired at 200. This image may be a pixel based bitmap.

Each bar code has certain rules constraining how the bar code is recognized. In two-dimensional bar codes, the spacing/ pitch/ size of and between the black and white bars often represent the information. Certain rules constrain what



is a legal bar code. One such rule is the dead space rules, which defines legal characteristics of the edges of the bar code. The following description defines using the dead space rules, however, it should be understood that other

5 constraining rules could alternately be used.

The bitmap is processed at 205 to look for dead space 208 in the bar code. The amount of spacing, which represents sizes of white and black parts, is then determined. The number of pixels which will represent each part can be ascertained.

10 The image is then processed to find the number of white or black spaces 215, the next number of white or black spaces 220, and continuing until the ending dead space 222. Each blank space can be defined as being a certain number of pixels in the image sensor 118.

15 Image straightening algorithms can be used to rotate the image and straighten it in order to avoid improper values.

Then, these raw values at 210 that are indicative of the content of the bar code can be decoded by a conventional bar code decoding technique at 215. This system describes using

20 an alphanumeric bar code such as the type 39 or type 128 bar code. 215 shows decoding these raw values to obtain the output representing the content of the bar code.

In this way, the image sensor which can be used for video output in a portable telephone, or for obtaining for digital

pictures in a PDA, can become a bar code scanner. This system also facilitates using the special kinds of bar codes which are described herein with reference to the additional embodiments.

5 First Embodiment - Personal Identification. Personal cards such as driver license's and credit cards may include a user's personal identifying information. Signatures are conventionally used, but can be imitated by a clever forger. Photographs can also be used. However, a forger may slice out  
10 the photograph and replace it with a duplicate in order to spoof the system. The present application defines printing a bar code on the personal identification card. The bar code can be encrypted, and can include additional personal identifying information.

15 U.S. Patent 5,420,924 describes putting a bar code on a personal identification card. However, this system recognized that not enough information can be stored. Therefore, this system took a slice of the overall image.

The information which is stored using this technique can  
20 include any personal identifying information, including a picture of the user's face, fingerprint information, dynamic information about the user's signature, i.e. the way that the user actually makes the signature. This can include the speed of signing, the technique of holding the pen, and the like.

These latter features are more difficult for a forger to copy. This information is stored as data (e.g. dv/dt of the pen, time, angles, etc.) and stored in the bar code. If an image is used, the image should be of reduced resolution e.g. 20 by 20 pixels. Fingerprints can be stored as vectorized images of the fingerprint (e.g. using Adobe Streamline) or the like. The information is also preferably encrypted using a one way code e.g. such as public key cryptography. All of the public, that is every decoding station, is given the decoding key.

- 5 20 pixels. Fingerprints can be stored as vectorized images of the fingerprint (e.g. using Adobe Streamline) or the like. The information is also preferably encrypted using a one way code e.g. such as public key cryptography. All of the public, that is every decoding station, is given the decoding key.
- 10 Only authorized coders, such as the issuers of the cards are given the encoding key. An unauthorized user cannot make an authorized item of information in this way.

- Each item of information can be tested using a hash function. Only information from the authorized user will pass the hash function.
- 15 the hash function.

- The system described herein uses a type 39 bar code. A typical type 39 bar code has an unlimited number of total digits. Each digit can represent any of 0 through 9, A through Z or any of five punctuation characters. According to the present system, it is recognized that this combination provides the possibility of 41 different values for each digit.
- 20 the present system, it is recognized that this combination provides the possibility of 41 different values for each digit.

Figure 3 also shows the encoding operation. The bytes representing the code, shown as 320, are converted into a base

N number at 305, where N is preferably the highest base that can be represented by all of the digits of the bar code or at least 80% of the digits. Here, a base 41 number is used. The digits zero through 9 represent their own value zero through 9, A through Z represent  $10_{41}$  through  $37_{41}$ , and the punctuation characters represent, respectfully,  $38_{41}$  through  $41_{41}$ . This same scheme can be used for any base of numbers.

At 310, the file representative of the personal information is converted to base 41. This is then encoded as a type 39 bar code at 315. The value is then encrypted at 320 using a one way function, and stored on the credit card at 325. Since the type 39 bar code has no limit on length, any amount of information can be stored in this way.

The bar code is read out and reconverted back to the original number at 330 and is used to drive a display device shown as 335 to display the characteristics. In the case of dynamic signature information or other such information, the stored characteristics may be directly compared against the sample instead of being displayed.

Alternatively, the information can represent a pointer to a database, e.g. a publicly available database. This database can later be accessed as part of an information transfer.

In this system, the information can represent an address, e.g. a number that is associated with a special function. The

address is used to access a publicly available information network, e.g. by direct connection or by the Internet. As an example, the bar code may store an address command AD, followed by a base 39 alphanumeric value 4DMKDP. The bar code is scanned to obtain the command to obtain the image from address 4DMKDP. The value 4DMKDP may be converted to hex or binary prior to the request.

The database returns the image of the person.

Another embodiment shown in Figure 4 uses bar codes to enter information into the computer. The Figure 4 embodiment stores scannable non-alphanumeric information, e.g. bar code information, as some part of a communication - here an advertisement. The advertisement can be a print advertisement, a television advertisement, or an Internet advertisement for example. The advertisement 400 includes a bar code 405 therein. The bar code 405 is associated with the advertisement, and includes some additional information about the advertisement. For example, the bar code may include the web site address of the company preparing the advertisement, or appointment information about the advertisement, or a "vcf file" or the like which is an importable file with address information about the company or author sponsoring the advertisement.

In operation, the user brings one of the clients, either the cellular telephone 310 or PDA 315, into range of the bar code 405. The client reads the bar code and decodes it as noted above. The decoded information can represent ASCII  
5 information, a compressed file such as a zip file, G code information, or any other compressed or non-compressed information. The contents are automatically input into the client. The contents can directly represent that information, in which case the information is input into the client. For  
10 example, the information can directly represent the ASCII information indicating the website. Alternatively, the information can represent a pointer to a database, e.g. a publicly available database. This database can later be accessed as part of an information transfer.

15 For example, Palm systems enable a hot sync where the portable computer is synced with another computer that is running hot sync software.

In this system, the information can represent a cue, e.g. a number, that is associated with a special function. The cue  
20 is used during a hot sync to access a publicly available information network, e.g. by direct connection or by the Internet. The cue 431 is sent over the Internet 432 to the server 450, and addresses more detailed information in a

memory of the server. The server returns that information as 455, and the client receives the more detailed information.

As an example, the bar code may store an cue command CX, followed by a base 39 alphanumeric value 4DMKDP. The bar code  
5 is scanned to obtain the command to cue to value 4DMKDP during the next hot sync. The value 4DMKDP may be converted to hex or binary prior to the hot sync.

During hot sync, the database returns the full text of the detailed information, e.g., "visit the website at  
10 <http://www.pdascan.com/~more> to get a free gift." Any desired length or size of information can be returned.

As described above, therefore, this system enables the information in the bar code to be used as an address for look up address from a database. The database can be accessible  
15 over the Internet. During a later hot sync, this information can be translated into more detailed information which can be returned from the hot sync.

This information can be a hyperlink. The hyperlink can also use the techniques disclosed in co-pending application  
20 number 60/161,700, entitled Internet Browsing From A Television, in which the origin of the hyperlink is included within the hyperlink itself. In this embodiment, a hyperlink may be stored for later visitation. The hyperlink also include a code therein which indicate the

source from which the hyperlink originated. For example, the source may indicate the name of the print magazine, or the web page from which the hyperlink originated, or the like. In this way, the advertisement service can keep track of which

5 advertising forms produce the best results. In addition, this facilitates a paradigm whereby the advertiser pays an advertising fee which is based on the number of website visits from the advertisement.

Figure 5 shows using this system as part of a

10 communication which is an email. A displayable bar code 500, in image format, e.g. a GIF, JPEG or PDF, is stored as part of the message. This bar code is then displayed in the specified format to a user. The bar code includes the information described above.

15 Figure 6 shows an alternative display which is presented to a user. The email is displayed with its usual text part 600, which describes text of the message. The text indicates information about something to happen in the future e.g. a meeting. If the user wants to go to the meeting, they are

20 invited to scan the bar code 605. The bar code, once scanned is translated into information for a PDA, e.g. in Palm or Outlook format. The information may say "bar code meeting"; Thursday 4:00-6:00 p.m. This information is then automatically input into the PDA. As above, this text can



represent the actual text information, as is shown in Figure 6. It can represent a compressed form of the actual information, such as compressed using G code. Alternatively, the information can represent a cue address to be used for a look up table during a hot sync or other information transfer, as previously described herein. This information can be printed, and scanned off the printer, or can be scanned directly off the screen. The system shown in Figure 6 shows scanning the code to input the information.

10       The communication can also include auxiliary codes 610. A first code can be scanned to send an automatic acceptance or declining by email. The format for the email acceptance can also be included within the code, or can simply be a pre-stored email saying a user name A (filled in by the scanning software) has accepted your meeting B (filled in from the information from the bar code).

15       The present system defines using bar codes to enter relatively large amounts of information into the computer. Figure 7A through 7C shows special new bar codes which are described according to the present system, which enable this storage of additional information.

20       Many different kinds of bar codes, that allow storing larger amounts of information, are known. One such bar code is the "Gettysburg Address" type matrix code. This requires,

however specialized scanning equipment. This equipment represents a capital investment and has been slow to catch on. The present system teaches, in Figure 7A, a special bar code which includes increased capacity bar code information, as well as backwards compatibility with previous bar code scanners. The code shown in Figure 7A includes two parts. A first part 710 is found as legal when scanned for linear codes. A second part 710 registers as invalid /illegal when scanned in this way.

The linear part 700 is a standard and commercially available linear bar code such as a UPC, Type 39 or Type 128 bar code. A conventional linear bar code reader will read and decode this portion. Part of the standard for these bar codes includes certain spacing requirements. For example, dead space at the edges of the bar code may be one of the required characteristics. These are shown as 702, 704. When this dead space is detected, and all other aspects of the bar code are detected, the bar codes can be read and decoded, shown as 711.

The remainder of the bar code may be a code which fails the decoding requirements for the linear bar code 700. This failure type bar code can represent a matrix code, for example, of any desired type. For example, this can be a Gettysburg Address or Vericode type matrix code. In addition, however, it can be a special kind of matrix code in which each

bar shown as 720 is itself made up of another bar code extending in the vertical direction. The spacing between the bars 720, 722, 724 may also include information. Within each bar 720, for example, the pattern also provides additional  
5 information. In this way, the bar code is actually formed of two different bar code scans. A scan in the direction 730 obtains first information, and a scan across each line in the direction 732 obtains additional information. After scanning the line 732, the system scans along the line 734 to obtain  
10 the next item of information. If this is obtained from a camera, however, the whole image can be obtained and later processed using processing techniques to obtain the scan information. In addition, scan information can be obtained from the linear bar code part 700. Figure 7A shows the linear  
15 part taking up approximately twenty-five percent of the area of the entire bar code. However, the two-dimensional scan can take up much less area, e.g. as little as five to ten percent. When scanning with a conventional bar code scanner of the linear type, the bottom portion may be scanned to obtain the  
20 two-dimensional bar code information. Enhanced bar code information can be obtained from the additional portion. This enhanced information can be additional information, or it can be the same information as in the first bar code portion, as well as additional information.

In the context of this system, the linear bar code information can represent an address for look up code of the type described above with reference to Figure 4. The enhanced or non-linear information 710 can represent the total  
5 information. A person with a sufficiently advanced bar code scanner can read the entire information. A person with only a linear bar code scanner, however, may scan only the information 700, and then updates the information via a hot sync.

10 An additional way of using this information, for example for scanning products, is also contemplated. Scan part 700 may include a Universal Product Code or UPC. Scanning part 710 may include additional information about the product, such as a description, or picture. The picture of the product may  
15 be displayed to the sales clerk, so that the sales clerk can verify that the product being purchased is actually the product that the user is presenting. Both parts of the bar code may represent information about the product. The part 700 represents basic information and the part 710 represents  
20 advanced information.

A second enhanced bar code shown in Figure 7B is a standard linear bar code or two-dimensional bar code with additional information stored in the gray scale. Figure 7B show the system configured as a two-dimensional bar code. A

first stripe 700 represents a dark (i.e. non-white) stripe. A second stripe 702 represents a white stripe and a third stripe 704 representing another dark stripe. Similarly, the code 699 alternates between white stripes and dark stripes throughout the entire code. In this embodiment, however, the dark stripes 700 are not actually black, but may be a color that is a shade of gray. For example, 16 or 256 different grayscale levels may be defined. Each time a code is detected, its grayscale value is obtained as a numeric value. Similarly, the white stripes 702, 706 may actually be a shade of gray. In this system, rather than simply obtaining spacing information, spacing information and grayscale information are both obtained from the scanning of the code. The gray scale information can be obtained when a camera type imager is used, since the color of the stripes can be obtained in addition to the spacing of the stripes. An alternative is that the white areas 702 are not pure white, but are rather some shade of white which can be characterized between zero and sixteen for example.

Information is obtained from both the shade(s) of gray of the dark portion(s), the white portion(s), and the spacing.

In one embodiment, the sequence of the numbers defining the gray scale levels provides the information. For example, hex value is defined by grayscale values of each gray line.

This information is used totally separately from the information that is obtained from the linear barcode information.

Yet another alternative does not use black portions and  
5 white portions, but rather uses alternating grayscale  
portions, with each alternating portion representing a  
grayscale value. Preferably a system is used whereby the gray  
scale is itself coded as either the gray scale or the  
compliment of the gray scale to provide maximum contrast  
10 between the bars 700, 702.

An alternative system shown in Figure 7C uses color bars  
in the bar code. Not only is the spacing between the bars  
determined, but also the numerical value representing the bar  
values themselves. For example, each color can be represented  
15 by an eight bit value. That eight bit value is obtained, and  
used as part of the retrieved information. The eight bit  
value can represent 2 hex digits. Again, this information can  
be used as supplemental to the spacing information obtained by  
the bar code.

20 In the latter two systems, color is described as being  
used with a two-dimensional bar code but can also be used with  
a three-dimensional bar code. In addition, in this system,  
the color and the spacing can both be used. By taking the  
available number of digits, and representing the color by that

available number of digits, a number in base  $n$ , where  $n$  can be a very large number, can be obtained. This facilitates storing even more information into a bar code.

These codes preferably follow the paradigm described  
5 above, that scanning with a monochrome scanner may return only a part of the information, e.g. an address to be later used for lookup. The color/grey scale information can be used to provide the actual information. For example, the digits represented by the grey scales or colors can be concatenated  
10 to form the overall information. Scanning the code gives the bar code information; while looking at the detailed information gives the enhanced information.

Any of these enhanced information codes can be used with the dual information code described above.

15 Other embodiments are contemplated.

What is claimed is:

1        1. A bar code, comprising:  
2        a first bar code portion, which represents a first format  
3 bar code, and is found as valid by a first bar code scanning  
4 process to provide first information, and a second bar code  
5 portion, formed in a second format which is different than  
6 said first format, but associated with said first format bar  
7 code portion, and said second bar code portion representing  
8 additional information beyond the first information provided  
9 by said first bar code portion

1        2. A bar code as in claim 1 wherein said second bar  
2 code portion is a two dimensional bar code.

1        3. A bar code as in claim 1 wherein said second bar  
2 code portion is found invalid by said first bar code scanning  
3 process which is used to decode said first bar code portion.

1        4. A bar code as in claim 3 wherein said first bar code  
2 is a standard linear bar code which is one of a UPC type code,  
3 a Type 39 type code, or a Type 128 type code.



1           5.    A bar code as in claim 1 wherein said second bar  
2 code portion includes information which is encoded in two  
3 separate directions.

1           6.    A bar code as in claim 1 wherein said second bar  
2 code portion includes information in one of a color or a gray  
3 scale of the bar code.

1           7.    A bar code as in claim 1 wherein both of said first  
2 and second bar code portions represent personal identification  
3 information, wherein said first bar code portion represents a  
4 first part of personal identification information, and said  
5 second part represents a greater quantity of information than  
6 said first part.

1           8.    A bar code as in claim 1, wherein said additional  
2 information defines information which is related to said first  
3 information.

1           9.    A bar code as in claim 1, wherein said additional  
2 information includes the same information as said first  
3 information, and also includes additional information.

1           10. A bar code as in claim 8 wherein said additional  
2 information includes supplemental information to the  
3 information included in said first bar code portion.

1           11. A bar code, comprising a first part which is  
2 interpreted by a first bar code scanning process to obtain  
3 first abbreviated information, and a second part which is  
4 interpreted by a second bar code scanning process to obtain  
5 second information, which has more information than said first  
6 information.

1           12. A bar code as in claim 11 wherein said first  
2 information is in a linear bar code and said second  
3 information is in a two dimensional bar code.

1           13. A bar code as in claim 11 wherein said second bar  
2 code portion is found invalid by a scanning process which is  
3 used to decode said first bar code portion, so that said  
4 scanning process decodes only said first bar code portion and  
5 not said second bar code portion.

1           14. A bar code as in claim 11 wherein said first bar  
2 code is one of a UPC code, a type 39 bar code or a type 128  
3 bar code.

1        15. A bar code as in claim 11 wherein said second  
2 information is in a gray scale of the bar code.

1        16. A bar code as in claim 11, wherein both of said  
2 first and second parts represent personal identification  
3 information, wherein said first part represents a first part  
4 of personal identification information, and said second part  
5 represents a greater quantity of information than said first  
6 part.

1        17. A bar code as in claim 11 wherein said second  
2 information is in a color of the bar code.

1        18. A method comprising:  
2        scanning a bar code with a first scanner to obtain first  
3 information; and  
4        scanning said bar code with a second scanner, different  
5 from said first scanner, to obtain second information,  
6 different than said first information.

1        19. A method as in claim 18 wherein said first scanner  
2 is a one dimensional scanner which scans a one dimensional bar  
3 code to obtain information therefrom.

1        20. A method as in claim 18, wherein said scanning with  
2        said first scanner scans a first part of the code, and said  
3        scanning with the second scanner scans a second part of the  
4        code.

1        21. A method as in claim 18 wherein said second  
2        information is obtained from a different direction than said  
3        first information.

1        22. A method as in claim 18 wherein said second  
2        information is obtained from one of a color or a grayscale of  
3        the bar code.

1        23. A method as in claim 18 further comprising decoding  
2        the bar code to obtain information about personal  
3        identification therefrom, in a base N format, where N is at  
4        least 80% of the capability of all digits of the bar code.

1        24. A bar code comprising:  
2        / A first part having information encoded therein in a  
3        first bar code format; and  
4        A second part having information encoded therein in a  
5        second format, different than said first format.

1        25. A bar code as in claim 24 wherein said second part  
2 has a greater quantity of information than said first part.

1        26. A bar code as in claim 24 wherein said second part  
2 has related information to said first part.

1        27. A bar code as in claim 24 wherein said first bar  
2 code format is a linear bar code format.

1        28. A bar code as in claim 27 wherein said second bar  
2 code format is a matrix format.

1        29. A bar code as in claim 24 wherein said second format  
2 is a color bar code format.

1        30. A method comprising:  
2        { obtaining personal identification information,  
3        converting said personal identification information to a  
4        string of digits of base N, where N is greater than 10;  
5        forming a bar code representing said base N number; and  
6        using said bar code to represent said personal  
7        identification information.

1        31. A method as in claim 30 wherein said bar code is in  
2 a specified format that uses at least eighty percent of the  
3 available digits of said bar code in said base N number.

1        32. A method as in claim 30 wherein said converting  
2 comprises converting to a form which uses all numbers, and at  
3 least some letters representing base N numbers greater than  
4 10.

1        33. A method as in claim 30 wherein said personal  
2 identification information includes an address to be used to  
3 look up additional information.

1        34. A method as in claim 33 wherein a first part of the  
2 bar code includes actual personal identification information,  
3 and a second part of the bar code includes an address to look  
4 up additional characteristics.

1        35. A method as in claim 34 wherein said second part of  
2 the bar code is a linear bar code and said first part of the  
3 bar code is an additional part.

1        36. A method as in claim 35 wherein said additional part  
2 is a two dimensional part.

1        37. A method as in claim 35 wherein said additional part  
2 is a color or grayscale part.

1        38. A method as in claim 30 wherein said personal  
2 identification information is a picture.

1        39. A method as in claim 30 wherein said personal  
2 identification information is dynamic information about the  
3 way that the user takes some action.

1        40. A method of forming a communication, comprising:  
2        forming a communication;  
3        forming a bar code as part of the communication, said bar  
4 code including scannable information which, when scanned,  
5 forms information that is supplemental to said communication.

1        41. A method as in claim 40 wherein said communication  
2 is an advertisement and said bar code represents a way to  
3 obtain more information about said advertisement.

1        42. A method as in claim 40 wherein said communication  
2 describes a time and place of some event, and said bar code  
3 represents said time and place.

1        43. A method as in claim 42 further comprising scanning  
2        said bar code to automatically enter said time and place into  
3        a computer doing the scanning.

1        44. A method as in claim 40 wherein said communication  
2        is an email.

1        45. A method as in claim 44 further comprising an  
2        additional scannable bar code as part of said email which  
3        enables a user to automatically make a decision about contents  
4        of said email and send said decision to a remote location.

1        46. A method as in claim 45 wherein said decision is an  
2        acceptance or rejection.

1        47. A method as in claim 40 wherein said bar code  
2        represents an address to additional information.

1        48. A method as in claim 47 further comprising using a  
2        computer which has scanned said bar code to access a publicly  
3        available database with said address; and  
4        obtaining additional information related to said bar code  
5        from said publicly available database.



1           49. A method as in claim 48 wherein said publicly  
2 available database is accessible via the Internet.

1           50. A method as in claim 40 wherein said code includes  
2 an auxiliary code which is scanned to automatically take an  
3 action.

1           51. A method as in claim 40 wherein said bar code is a  
2 dual type bar code, with a first a part that is interpreted by  
3 a first bar code scanning process to obtain first information  
4 and a second part which is interpreted by a second bar code  
5 scanning process to obtain second information that has more  
6 information than first information.

1           52. A method as in claim 51 wherein said first part is a  
2 linear bar code and said second part is a non-linear bar code.

1           53. A method as in claim 51 wherein said first process  
2 is a scan in a first direction and said second process is a  
3 scan in a second direction.

1           54. A method as in claim 51 wherein said second part is  
2 one of grayscale or color of the bar code.

1        ~~55.~~ A method of reading a bar code, comprising:  
2            using a camera in a consumer device to obtain an image of  
3 a person at a first time;  
4            using the same camera in said consumer device to obtain  
5 an image of a bar code at a second time; and  
6            using a processor in said consumer device to  
7 automatically decode contents of said bar code.

1            56. A method as in claim 55 wherein said consumer device  
2 is a cellular telephone.

1            57. A method as in claim 55 wherein said consumer device  
2 is a portable computer.

1            58. A method as in claim 55 wherein said decoding  
2 comprises determining a first portion of the bar code in a  
3 first linear bar code format, and determining a second portion  
4 of the bar code which is in a second format different than  
5 said linear format.

1            59. A method as in claim 58 wherein said second format  
2 is a two-dimensional format.

1           60. A method as in claim 58 wherein said second format  
2 includes information in the color of the bar code.

Abstract

Bar codes used for various applications. A bar code can be used for biometrics, or for computer data entry. A special bar code is described that has additional information, but can  
5 be read by other readers.

10


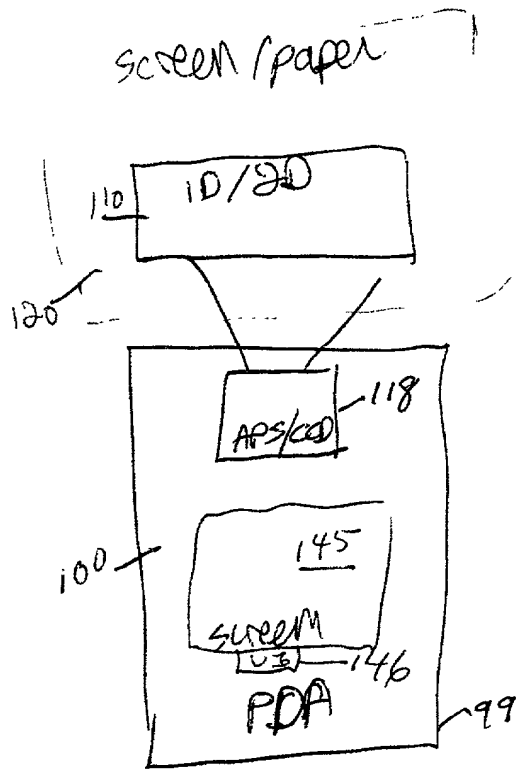


Fig 1A

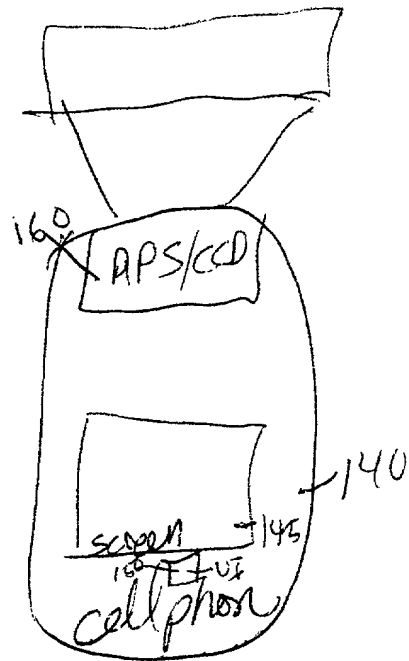

1B

*Hand-drawn*


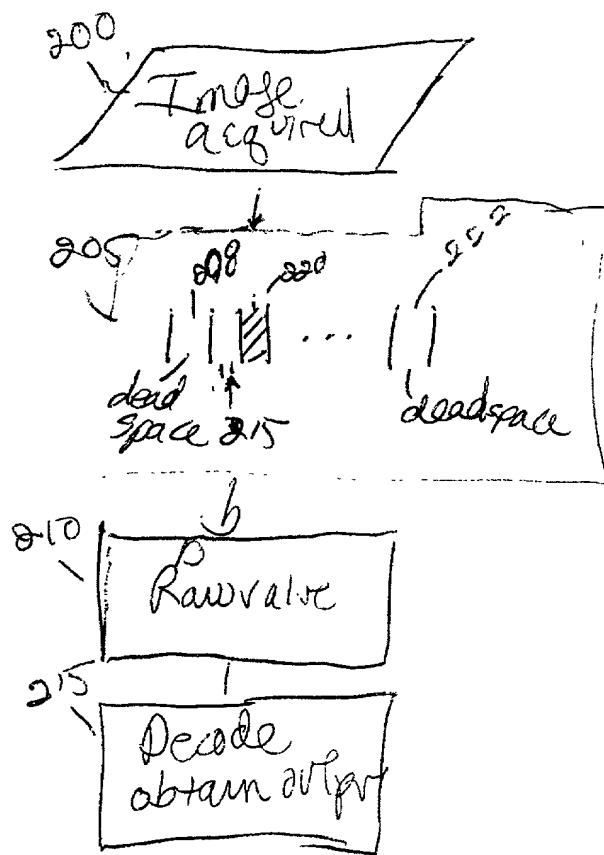


FIG 2


A simple line drawing of a smiling face with curly hair, enclosed in a square frame. The face is circular with two small circles for eyes, a small circle for a nose, and a curved line for a smile. The hair is represented by a series of small, overlapping loops along the top edge of the face. The entire drawing is contained within a square border.



~~Printed~~  
~~IV~~



FIG 4

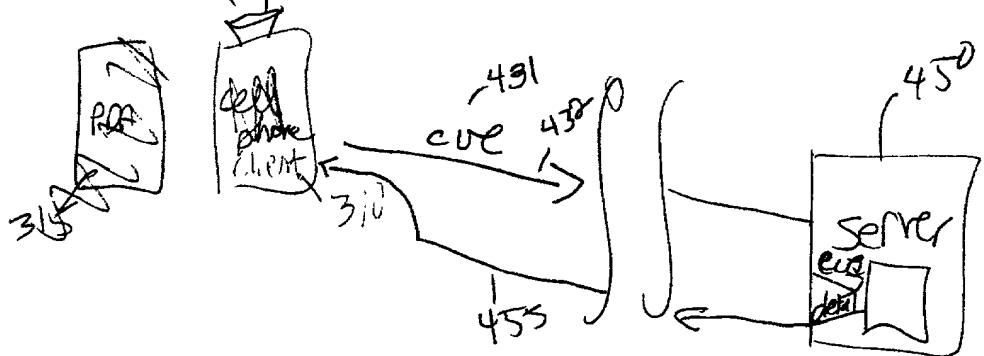

newflesh.com



From: S@com0.com  
To: X@comp.com

Subject: Bar code meeting

Barcode meeting, tomorrow at 5



FIG 5

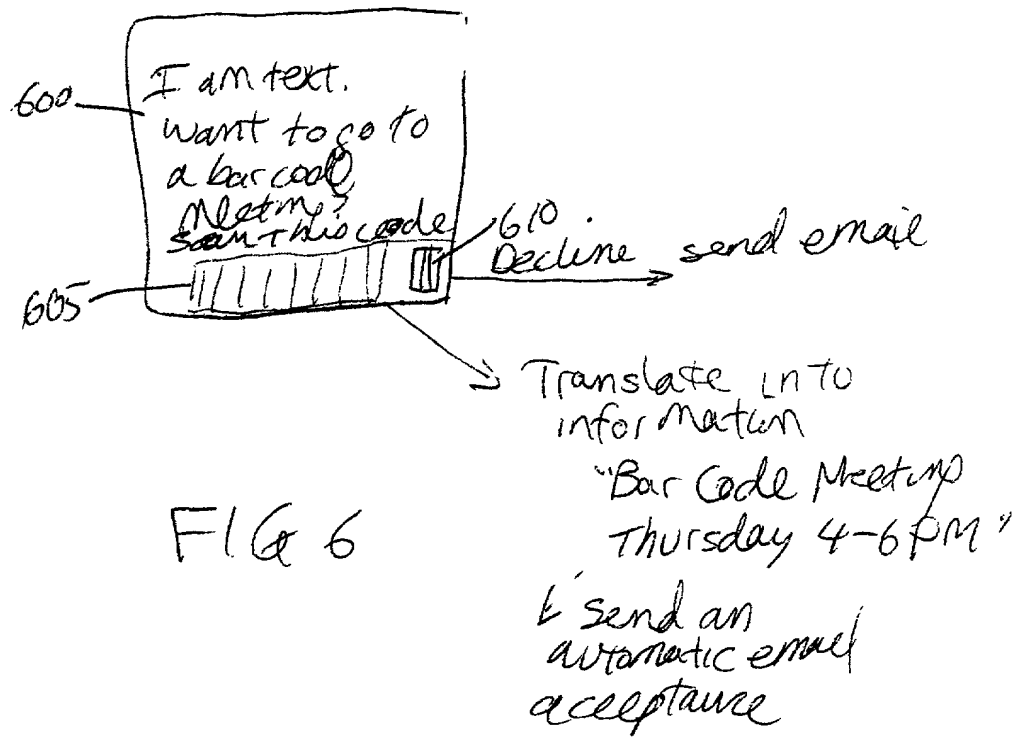


FIG 6

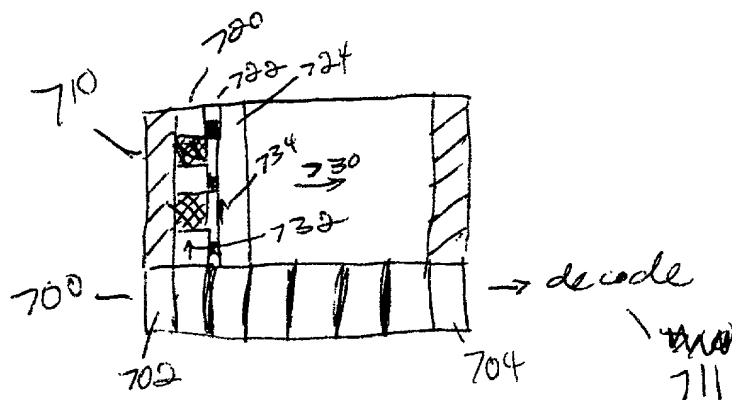


FIG 7A




FIG 7B




FIG 7C

**COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **BAR CODE DATA ENTRY DEVICE**, the specification of which:

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_.

☐ was described and claimed in PCT International Application No. \_\_\_\_\_ filed on \_\_\_\_\_ and as amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim the benefit under Title 35, United States Code, §119(e)(1) of any United States provisional application(s) listed below:

U.S. Serial No.	Filing Date	Status
-----------------	-------------	--------

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose all information I know to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Serial No.	Filing Date	Status
-----------------	-------------	--------

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

**Combined Declaration and Power of Attorney**

Page 2 of 2 Pages

Address all telephone calls to SCOTT C. HARRIS at telephone number (619) 823-7778.

Address all correspondence to SCOTT C. HARRIS at:

Customer No. 23844  
Scott C. Harris  
P.O. Box 927649  
San Diego, CA 92192-7649

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: Scott C. Harris

Inventor's Signature:

Scott C Harris  
3329 Cerros Redondos, Rancho Santa Fe, CA 92067

Date:

7/19/00

Residence Address:

Citizenship: USA

Post Office Address: P.O. Box 927649, San Diego, CA 92192